

Licensed Polyolefin Technologies and Services

Spherizone

Latest-generation polypropylene process technology based on a multi-zone reactor that produces high-performance polypropylene and novel polyolefins.

www.lyondellbasell.com/technology



Spherizone plant – SamsungTotal, Daesan, South Korea

LyondellBasell's breakthrough *Spherizone* multi-zone circulating reactor process provides an economical and efficient method of manufacturing a wide range of high-quality polypropylene and novel, propylene-based polyolefinic resins. Since the launch of the *Spherizone* process in 2004, more than three million tonnes of capacity have been licensed.

A new chapter in polypropylene technology

For many years, polypropylene process development has focused on bimodal technology and increasing operating temperatures to improve product properties. Bimodality has been achieved by operating two reactors in series at different operating conditions, resulting in a polymer with two performance characteristics combined on an "intraparticle" level. In the *Spherizone* process, bimodality involves one single reactor operating different conditions within each zone, resulting in the blending of multiple properties on a macromolecular level.

With the ability of the *Spherizone* process to drive products to new property and performance extremes, the technology continues to emerge as the new benchmark for polypropylene production. *Spherizone* process resins have the potential to expand polypropylene's use into entirely new applications and markets.

Key characteristics of *Spherizone* process technology

Safety and environment

- LyondellBasell's process technologies have a safety record among the best in the industry
- Reduction of both resource consumption and emissions and low energy consumption
- Recovery and recycling of non-reacted monomers
- No undesired by-products from the reaction

Product capability and versatility

- Wide range of high-quality PP products possible
- Novel resins with expanded properties and performance
- High product quality, allowing bimodality in MFR and composition
- Minimum property variation due to process stability and LyondellBasell's *Avant* catalyst performance

Reliability

- Structurally identical to the *Spheripol* process, *Spherizone* has demonstrated high reliability

Design flexibility

- Single-line capacities of up to 500 kt/a can be provided
- Homopolymer, random copolymer or heterophasic impact copolymer production designs
- Polymer grade propylene or chemical grade propylene feedstock

Modular flexibility

- A modular design enabling the low-cost addition of a fluidized bed gas-phase reactor for heterophasic impact copolymers

Economics

- Capital costs are competitive with any PP technology currently available
- Best in class operating costs

Spherizone process description

In combination with LyondellBasell's *Avant* catalysts, the *Spherizone* process produces spherical polymer particles directly in the reactor. The specially designed loop reactor consists of two reaction zones, and the growing polymer granules are circulated between the two different zones of the multi-zone circulating reactor (MZCR). In the riser zone, the polymer particles are entrained upward through a fast fluidization regime in the monomer gas flow. At the top of the reactor, the polymer particles then enter the downer zone, where a downward, dense phase plug flow pattern occurs under gravity. At the bottom of the reactor, the polymer particles are again fed to the "riser" section, and the reaction cycle is repeated.

In order to create reaction conditions in the downcomer, which are different from the conditions in the riser, a barrier stream is injected in a stripping zone below the level of the polymer bed at the very top part of the downcomer.

With this type of system, a "One-Reactor Cascade" has been created. The stripping zone is the core of the MZCR, as it gives the unique feature of two fully controlled but separate polymerization conditions in just one single reactor.

The optional gas-phase copolymerization reactor and finishing section consist of highly efficient process steps utilizing the well-proven design of the *Spheripol* process technology.

Spherizone process – Product properties and performance

The versatility of the *Spherizone* process is demonstrated by the high-quality product range it produces, which includes all standard polypropylene grades as well as unique polyolefin products. The capabilities of the *Spherizone* process to deliver new performance potential across the entire product portfolio is illustrated by the extended product property graphic in figure 2.

As a result of the "One-Reactor Cascade" reactor, the operating window of the technology is drastically expanded and the product quality is greatly enhanced, resulting in the production of polypropylene resins that can outperform standard polypropylene grades.

LyondellBasell is one of the world's largest plastics, chemical, and refining companies. The company manufactures products at 59 sites in 18 countries. LyondellBasell products and technologies are used to make items that improve the quality of life for people around the world including packaging, electronics, automotive parts, home furnishings, construction materials and biofuels. More information about LyondellBasell can be found at www.lyondellbasell.com

Before using a LyondellBasell product, customers and other users should make their own independent determination that the product is suitable for the intended use. They should also ensure that they can use the LyondellBasell product safely and legally. (Material Safety Data Sheets are available from LyondellBasell at www.lyondellbasell.com). This document does not constitute a warranty, express or implied, including a warranty of merchantability or fitness for a particular purpose. No one is authorized to make such warranties or assume any liabilities on behalf of LyondellBasell except in writing signed by an authorized LyondellBasell employee. Unless otherwise agreed in writing, the exclusive remedy for all claims is replacement of the product or refund of the purchase price at LyondellBasell's option, and in no event shall LyondellBasell be liable for special, consequential, punitive, or exemplary damages.

Spheripol and *Spherizone* are trademarks owned or used by LyondellBasell group companies and are registered in the U.S. Patent and Trademark Office.

You can find out more about us by visiting our website at: lyondellbasell.com/technology

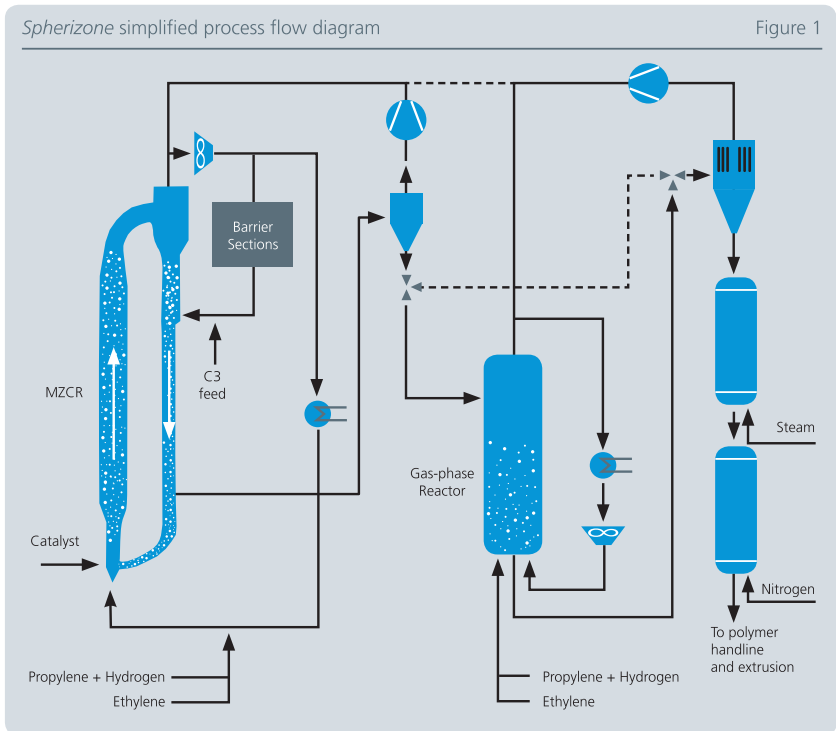


Figure 1

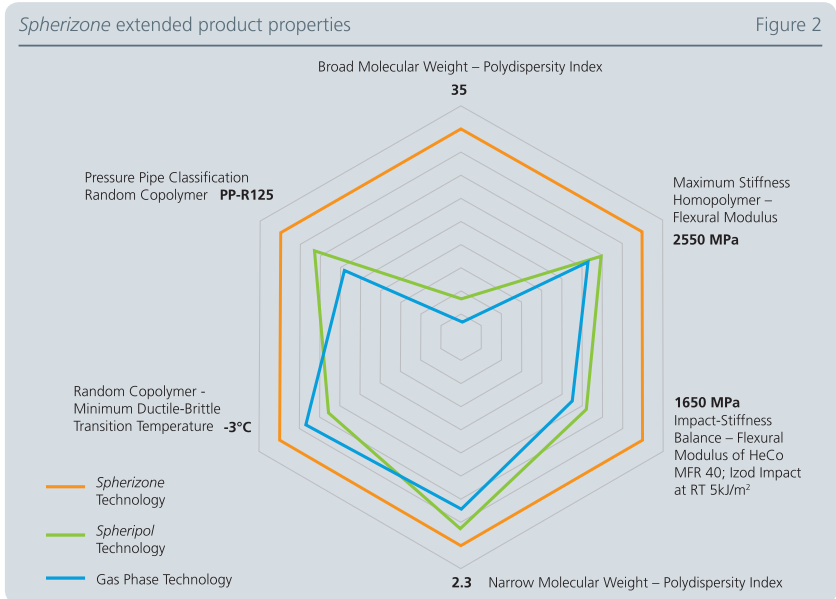


Figure 2

Products from the *Spherizone* process, for example, have surpassed the performance of conventional polypropylene used in pipe applications, including novel random copolymers with PP-R 125 classification

and new high-modulus heterophasic copolymers used in sewage and drainage pipe applications.

Spherizone process technology also enables the production of novel polyolefins, which are being used in entirely new applications previously the domain of traditional materials and competitive plastics. By extending the boundaries of polypropylene performance, the *Spherizone* process manufactures products with a very broad molecular weight distribution. These *Spherizone* process polyolefins replace conventional materials used in rigid packaging and other applications where extremely high melt strength is essential.